■ Power Switching & Controls
For *Business-Critical Continuity™*

Edco CP-24 Series

Camera Power Surge Protector
CCTV

The Edco CP-24 surge protector is easily installed directly at and in series with a camera's power terminal. The Edco CP-24 uses 2.1mm jacks to connect to the cameras power adaptor and power feed. High-speed SAD technology clamps high energy transients that could damage the CCTV equipment.

General Technical Specifications

Maximum Operating Voltage	36.8 VDC
Clamping Voltage	59.3 VDC
Operating Current	.5 A
Peak Pulse Power (10 x 1000 μs)	1500W
Peak Surge Current	25.6A
SPD Technology	Silicon Avalanche Diode (SAD)
Connection Type	2.1mm x 5.5mm Female/Male Power Jack
Operating Temperature	-40°C to +85°C
Dimensions (Inches [mm])	2.240 [56.9] L x .460 [11.7] W
Weight	0.6 oz
Warranty	1 year

Features

- Fits 2.1mm Camera Power Jack
- Works for 12 VDC, 24 VDC and 24 VAC camera power
- High energy silicon avalanche technology
- Operating current .5 Amps
- Combination camera power/video kit available.
- 1 year warranty

Ordering Information

Attached in series with camera power wiring.

CP-24 (For 12 VDC, 24 VDC, 25 VAC Systems)

EMERSON
Network Power

Installation

See Note 1.

1. Disconnect the power wire at camera and at the source.

2. Connect "protected" side of Edco CP-24 to the camera side of the wire and "unprotected" side of the device to the power source side of the wire.

3. Reconnect power source to camera.

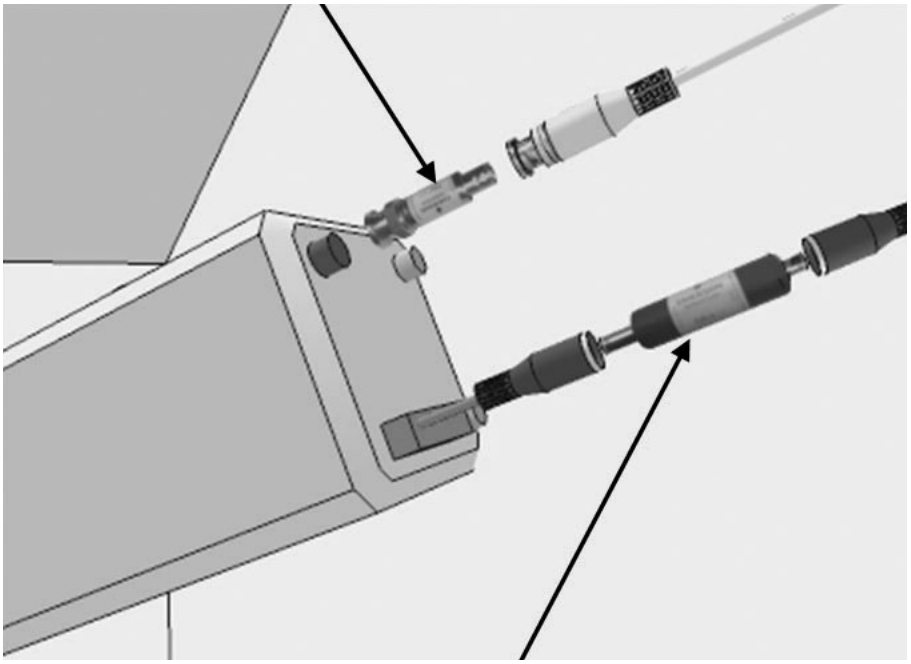

Edco CP-24 Camera Power Surge Protector

Notes:

1.The Edco CP-24 may be purchased in combination with the Edco CCTV-1 video line surge protector. For both devices order the Edco CP-CCTV.

2.The Edco CP-24 shall be installed per the applicable requirements of the National Electric Code, ANSI/NFPA 70.

Emerson Network Power.
The global leader in enabling *Business-Critical Continuity™*.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Industrial Power
- Infrastructure Management & Monitoring
- Outside Plant
- **Power Switching & Control**
- Precision Cooling
- Racks and Integrated Cabinets
- Services

Emerson Network Power Contact information

Headquarters
Surge Protection
100 Emerson Parkway
Binghamton, New York 13905
T: (607) 721-8840
T: (800) 288-6169
F: (607) 722-8713
E: contactsurge@emerson.com

www.emersonnetworkpower.com/surge

EMERSON
Network Power

IO-50182 12/12 Rev.0 Printed in USA

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2012 Emerson Electric Co.